

IMAGETEAM™ 3800LR Hand Held Linear Imager



The IMAGETEAM™ 3800LR is a high performance, hand held bar code scanner. The IT3800LR uses linear imaging technology to set a new standard for hand held scanners by combining a bright, sharp aiming line with high resolution imaging to deliver exceptional reading performance.

The IT3800LR handle is smoothly contoured to fit all sized hands, plus has a soft grip area to add comfort and prevent slipping. Its aesthetically pleasing look surrounds a rugged, durable construction, built for demanding work environments. The IT3800LR is so durable, it carries a 5 year warranty.

Each decoded output scanner has the capability to connect as a keyboard wedge, use the serial port, output non decoded laser compatible signals, or operate in wand emulation mode. The IT3800LR connects to all popular PCs, Apple MAC, and portable data terminals. Models are available for IBM retail terminals (4683/93, OCIA), True RS-232, and PDF417 applications. A non decoded mode can be used with external wedge decoders and portable terminals or other devices with decoding capability. Standard cables are used to reduce replacement expense.

The IT3800LR is excellent in hand held scanning applications such as retail point of sale and in-store inventory. It operates from a tabletop holder in manual trigger mode, or may be placed in an adjustable stand for automated operation. The IT3800LR can be used indoors or outside in bright sunlight. Typical applications are retail point of sale, in-store inventory, document management, transaction processing of bar coded receipts, payment counter, outdoor sales kiosks, and reading of vehicle registrations.

Features & Benefits

Bright, Sharp and Focused Aiming Line

Easy to aim and scan codes in any lighting condition from darkness to full sunlight, tightly stacked bar code sheets, or small, high resolution labels.

Solid, Rugged Design

No moving parts inside and solid construction outside deliver years of reliable service in demanding work environments.

New Design

Attractive styling compliments most existing POS environments, while user comfort is enhanced by the smooth handle curves, soft molded grip area, and comfortable trigger.

Powerful, Flexible Architecture

Connects and interfaces to all major PCs, commercial and retail POS terminals easily and quickly with Windows® based programming tools or bar code programming menus.

Increased Reading Distances

Easily covers the full range of hand held scanning uses in point of sale and general purpose scanning applications.


Real World Reading Performance

Accommodates printer induced bar space variation, faded labels, short quiet zones, low contrast codes, dot matrix printing, and multipart forms with higher resolution, better optics, and improved decoding algorithms.

5 Year Warranty

Performance

| | |
|--|--|
| Illumination: | 630 NM Visible Red LED |
| Receiving Device: | 3648 element linear imager |
| Reading Distance: | From 1 in. (2.5 cm) to 8 in. (20.3 cm) on medium density codes |
| Reading Width: | 5 in. (12.7 cm) code width at 7 in. (17.8 cm) distance |
| Resolution: | 5 mil. at 3.5 in. (8.8 cm) distance |
| Skew Angle: | ±30° |
| Pitch Angle: | ±15° |
| Horizontal Velocity: | 2 in. (5.1 cm) per second |
| Minimum Reflectance Difference: | 30% |
| Scan Rate: | Programmable to 270 scans per second |
| Decode Rate: | 270 decodes per second |

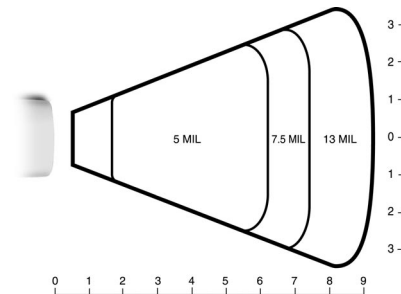

Typical reading zones on good quality bar codes

Mechanical/Electrical

Dimensions

| | |
|----------------------------|---|
| Length: | 5.3 in. (13.5 cm) |
| Height: | 6 in. (15.2 cm) |
| Width: | 3.1 in. (7.9 cm) |
| Weight: | 6.3 oz. (179.2 g) |
| Housing: | Polycarbonate/ABS blend, UL 94V0 |
| Power Requirements: | 5Vdc ± 10% at scanner (-11 model: 5 -12Vdc ± 10%) |

| | | | |
|----------------------|-----------------|----------------|-----------------|
| | | | Low Power |
| Current Draw: | <u>Scanning</u> | <u>Standby</u> | <u>-10 only</u> |
| @270 s/s | 275mA | 125mA | 30 mA |
| @67 s/s | 150mA | 125mA | 30 mA |

| | |
|-------------------------|---|
| Power Supply | |
| Noise Rejection: | Maximum 100mV peak to peak, 10 to 100 kHz |

Environmental

Temperature

| | |
|-------------------|--------------------------------|
| Operating: | +32°F to +122°F (0°C to +50°C) |
| Storage: | -4°F to 140°F (-40°C to +60°C) |

Humidity: 0 to 95%

Mechanical Shock: Operational after 25 drops from 5 ft. (1.53 m) to concrete

Ambient Illumination: 0 - 70,000 lux

ESD Protection: Functional after 15kV discharge

Vibration: Withstands 5G peak from 20 to 300 Hz

Agency: FCC Class B, CE EMC Class B, CE Low Voltage Directive, IEC60825-1 LED Safety: Class 1, UL, cUL listed, TÜV

MTBF: per MIL-HDBK-217F Ground Benign exceeds 100,000 hours

Symbologies: Codabar, Code 3 of 9 including PARAF, Interleaved 2 of 5, Code 2 of 5, Matrix 2 of 5, Code 11, Code 128, UPC, EAN/JAN, China Postal Code. PDF417 in 3800 PDF-12 model.

Interfaces: All popular PCs and terminals via keyboard wedge, keyboard replacement/direct connect, Apple ADB, USB, TTL level RS-232, wand emulation mode, TTL level Serial Wedge, and includes (HHLC) non decoded laser compatible output. IBM 4683/93 and OCIA retail terminals in 3800 LR-11 model. True RS-232 in 3800LR-13 model.

Warranty: Five year factory warranty.

Worldwide Offices

Offices Serving North America

Skaneateles Falls, NY
Tel: (315) 685-8945
Fax: (315) 685-3172
Charlotte, NC
Tel: (704) 537-1444
Fax: (704) 532-4191

Offices Serving Europe, Middle East, and Africa

Europe
Tel: Int +31 (0) 40 24 24 486
Fax: Int +31 (0) 40 24 25 672
United Kingdom
Tel: Int +44 (0) 1 925 240055
Fax: Int +44 (0) 1 925 631280
France
Tel: Int +33 (0) 1 461 04111
Fax: Int +33 (0) 1 461 04120

Germany

Tel: Int +49 (0) 7 477 151377
Fax: Int +49 (0) 7 477 151378

Offices Serving Asia and the Pacific Rim

Hong Kong
Tel: Int +852 2511 3050/2511 3132
Fax: Int +852 2511 3557

Japan

Tel: Int +813 52127392
Fax: Int +813 32617372

Offices Serving Latin America

Naples, Florida
Tel: (941) 263-7600
Fax: (941) 263-9689